

floridatile

CELLAR HDP



Shown: 34327 8x36 Meld

Inspired by planks found in an abandoned factory floor in Northern Italy, Florida Tile's Cellar^{HDP} perfectly captures the rich character of vintage boards. Rooted in history, these planks show the patina of heavy use by people, machinery, chemicals, and water for a unique rustic yet modern appearance. Cellar^{HDP} is as well suited for an industrial chic loft as it is for a farm to table restaurant.

A natural palette of bleached greys, aged charcoal, rich mocha or warm honey brown, allows you to create a floor that is exceptionally expressive. The timeworn surface texture and great variety of color tones make this line a bold statement in style. With industrial heritage and an ultra-natural look and feel, Cellar^{HDP} is as comfortable with forged steel, aluminum and exposed brick, as it is with hand-hewn beams.

Available in 8x36 plank format, a generous herringbone mosaic and a modern stack mosaic, Cellar^{HDP} combines the look of reclaimed wood using advanced HDP—High Definition Pocelain® printing technology with the technical performance of porcelain.

Cellar^{HDP} is appropriate for all interior applications in both residential and commercial settings, is entirely made in the USA of 40% pre-consumer recycled content, meets the DCOF AcuTest requirements to be installed in wet areas and is GREENGUARD® and Porcelain Tile certified.

SHADE VARIATION




Bleach




Meld



Tone

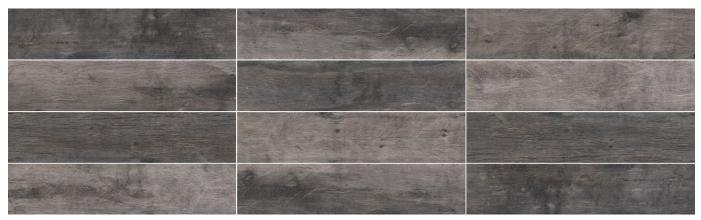

Char

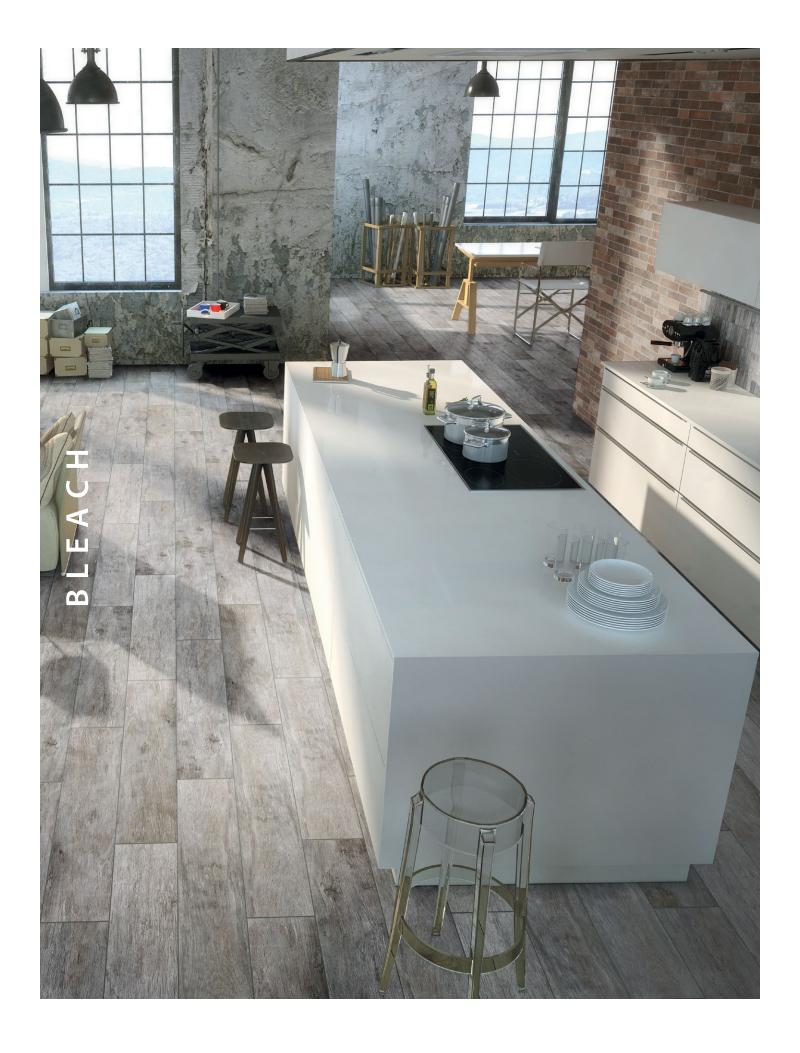



Shown: 34310 8x36 Bleach



34310 8x36 Bleach



34310/M2x12HER Bleach Herringbone Mosaic



34310/M1x4STKBleach Stack Mosaic





Shown: **34327 8x36** Meld




34327 8x36 Meld




34327/M2x12HER Meld Herringbone Mosaic



34327/M1x4STK Meld Stack Mosaic

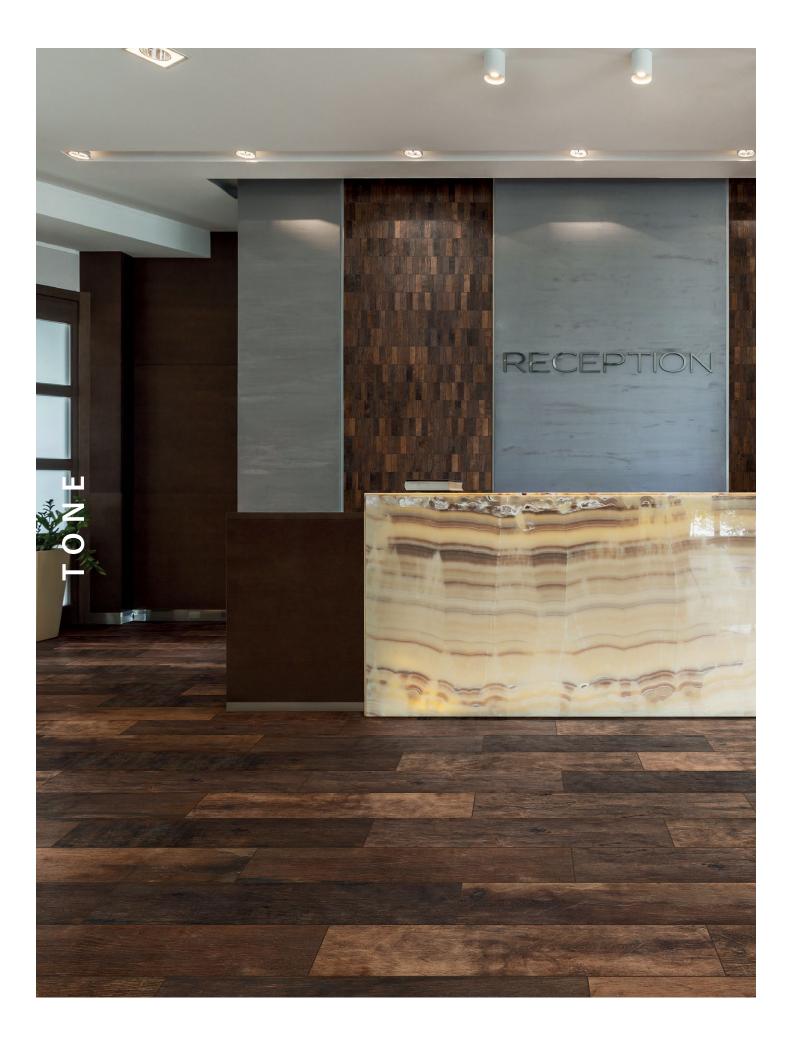

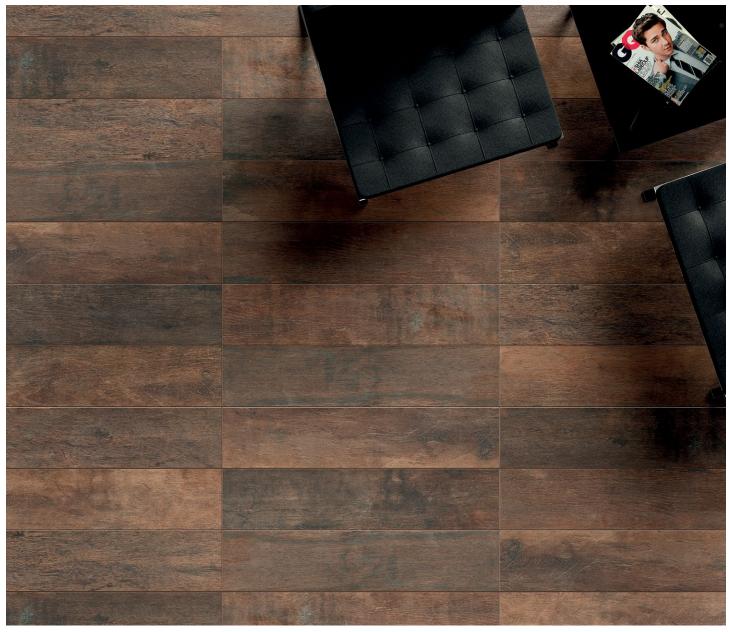

Shown: **34398 8x36** Tone



34398 8x36 Tone



34398/M2x12HER Tone Herringbone Mosaic



34398/M1x4STK Tone Stack Mosaic





Shown: 34316 8x36 Char



34316 8x36 Char



34316/M2x12HER Char Herringbone Mosaic



34316/M1x4STK Char Stack Mosaic



Shown: 34398 8x36 Tone

CELLAR HDP

в y floridatile

Typical Uses

Cellar^{HDP} color body porcelain floor and wall tile is appropriate for all residential and commercial wall, countertop and backsplash applications, all residential and most commercial floor applications.

Notice: Not all flooring products are suitable for wet areas, specialized applications or commercial use. Please refer to the American National Standard Specifications for Ceramic Tile (ANSI A137.1) for ceramic, stone and glass installation for specific usage and installation information.

This Florida Tile product will contribute to USGBC LEED points and the ANSI approved NAHB Green Building Points.

Properties (Floor)	ASTM	ANSI	Results ¹
DCOF AcuTest ²	A137.1	≥0.42	Pass
Visible Abrasion Resistance	C-1027	As Reported ³	Class IV
Glaze Hardness	Mohs Scale	N/A	7 Mohs
Break Strength	C-648	250 lbf.	770 lbf.
Water Absorption	C-373	<0.5%	<0.5%

¹These tests are performed by a 3rd party testing lab using industry standard equipment and techniques. Values are offered in good faith as being accurate and typical of normal production. Due to the natural variation of raw materials and manufacturing processes, the values of the purchased product for any particular

Field Tile Nominal Size ¹	Metric (cm)	Pcs./Sq Ft ²	Thickness ³
8" x 36"	20 x 90	.5	10mm

¹These values may vary from lot to lot.

Herringbone Mosaic Notice

Each M2x12HER Herringbone Mosaic is two parts, side A and side B; This item is sold (6) pieces per carton, in sets of (3) A's and (3) B's; The total coverage per carton is 5.7 SQFT.

Color Variations

Color reproductions in this printed piece may vary from actual tile colors. Final selection should be made from actual tile samples.



V4 = Random Variation

Random color differences from tile to tile, so that one tile may have totally different colors from that on other tiles. Thus, the final installation will be unique.















floridatile & HDP ** are registered trademarks in the U.S. of Florida Tile, Inc.© 2016

² ANSI A137.1 standard, ceramic tiles selected for level interior spaces expected to be walked upon when wet must have a minimum wet DCOF AcuTest value of 0.42.

Class 0 Not recommended for floors, Class I Light Residential, Class II Residential, Class III Heavy Residential or Light Commercial, Class IV Commercial, Class V Heavy Commercial.

²These values are based on actual sizes including the grout joint.

³ May not apply to textured surfaces or tiles with uneven back patterns.