
Schluter®-DILEX-EHK

Schluter®-DILEX-EHK is a stainless steel, cove-shaped profile for inside wall corners, countertop/backsplash transitions and floor/wall transitions in applications where limited movement is expected. DILEX-EHK provides a 23/32" *(18.5 mm)* radius to prevent the accumulation of dirt and makes cleaning simple. DILEX-EHK prevents surface water penetration and meets the maintenance and hygienic requirements of commercial kitchens, bathrooms, food processing plants, or any tiled environment where a sanitary cove base is desired.



Outside corner (90° or 135°)

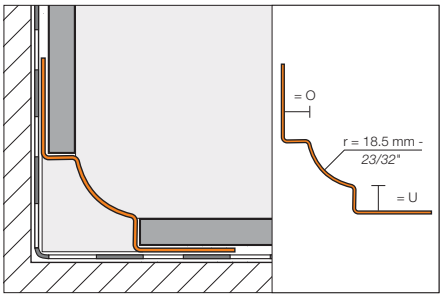


Inside corner, 3-way (90°)



Inside corner, 2-way (90° or 135°)



Connector

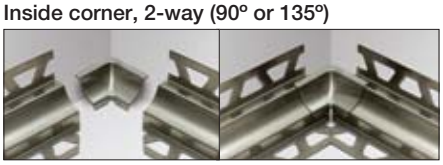



End cap



U: 7 mm = **9/32"** 9 mm = **11/32"**
11 mm = **7/16"** 16 mm = **5/8"**
O: 7 mm = **9/32"** 9 mm = **11/32"**
11 mm = **7/16"** 16 mm = **5/8"**

Schluter®-DILEX-EHK

Stainless steel 304 (1.4301 = V2A) (E)		Stainless steel 316L (1.4404 = V4A) (EV4A)					
Length = 2.5 m - **8' 2-1/2"** **U = floor or wall, O = wall** **Profile**	**$ / Length**	**Outside corner, 90°**	**Inside corner, 90° (2-way)**	**Inside corner, 90° (3-way)**	**Outside corner, 135°**	**Inside corner, 135°**	**$ / Unit**
EHK U 7/O 7	**105.89**	A/EHK 2 R18	I/EHK 2 R18	I/EHK 3 R18	E135/EHK2R18	I135/EHK2R18	**12.42**
EHK U 9/O 9	**108.91**						
EHK U 11/O 11	**112.40**						
Connector		V/EHK					**12.42**
End cap		E/HKW/G (Grey PVC only)					**6.53**

Stainless steel 316L (1.4404 = V4A) (EV4A)							
Length = 2.5 m - **8' 2-1/2"** **U = floor or wall, O = wall** **Profile**	**$ / Length**	**Outside corner, 90°**	**Inside corner, 90° (2-way)**	**Inside corner, 90° (3-way)**	**Outside corner, 135°**	**Inside corner, 135°**	**$ / Unit**
EHK U 7/O 7/V4A	**116.48**	A/EHK 2 R18	I/EHK 2 R18	I/EHK 3 R18	E135/EHK 2 R18	I135/EHK 2 R18	**12.42**
EHK U 9/O 9/V4A	**119.80**						
EHK U 11/O 11/V4A	**123.68**						
EHK U 16/O 16/V4A	**127.53**						
Connector		V/EHK					**12.42**
End cap		E/HKW/G (Grey PVC only)					**6.53**

Brushed Stainless steel 304 (1.4301 = V2A) (EB)		Brushed Stainless steel 316L (1.4404 = V4A) (EBV4A)					
Length = 2.5 m - **8' 2-1/2"** **U = floor or wall, O = wall** **Profile**	**$ / Length**	**Outside corner, 90°**	**Inside corner, 90° (2-way)**	**Inside corner, 90° (3-way)**	**Outside corner, 135°**	**Inside corner, 135°**	**$ / Unit**
EBHK U 7/O 7	**137.68**	A/EBHK 2 R18	I/EBHK 2 R18	I/EBHK 3 R18	E135/EBHK2R18	I135/EBHK2R18	**16.20**
EBHK U 9/O 9	**141.87**						
EBHK U 11/O 11	**146.43**						
Connector		V/EBHK					**16.20**
End cap		E/HKW/G (Grey PVC only)					**6.53**