Schluter®-DITRA-HEAT-PS and DITRA-HEAT-DUO-PS

Schluter®-DITRA-HEAT-PS and **DITRA-HEAT-DUO-PS** are peel and stick membranes that feature a pressure-sensitive adhesive (PSA) to bond the membrane to the substrate, replacing the need for thin-set mortar. Simply remove the transparent release film from the fleece side of the membrane to expose the layer of adhesive and embed into substrate using a float, screed trowel, or DITRA-ROLLER. The -PS versions offer the same core functions as DITRA-HEAT and DITRA-HEAT-DUO. Both peel and stick membranes are designed to secure the DITRA-HEAT-E-HK electric floor heating cables, and provide uncoupling, waterproofing, vapor management, and load support to ensure a long-lasting tile installation.

DITRA-HEAT-DUO-PS features a thicker bonding fleece that additionally provides sound control to reduce impact sound transmission through floor-ceiling assemblies and a thermal break that reduces heat loss to the substrate to improve floor warming response time, particularly over concrete substrates.

DITRA-HEAT-PS is 1/4" *(5.5 mm)* -thick and DITRA-HEAT-DUO-PS is 5/16" *(8 mm)* -thick. Both membranes feature cutting grooves, which provide an easy-cut guide and enhanced membrane flexibility.


A primer is not required to install DITRA-HEAT-PS/-DUO-PS, however, a primer such as Schluter®-PRIMER-PS or PRIMER-U is recommended when installing on a difficult-to-bond-to substrate.


Note: For applications requiring compliance with or certification to the ANSI A118.10 American National Standard Specifications for Load Bearing, Bonded, Waterproof Membranes for Thin-Set Ceramic Tile and Dimension Stone Installation, select the DITRA-HEAT or DITRA-HEAT-DUO membranes that are installed with thin-set mortar. Alternatively, the DITRA-HEAT-PS or DITRA-HEAT-DUO-PS membranes may be covered with the Schluter®-KERDI membrane, which is certified to meet ANSI A118.10.

For complete information, a step-by-step installation video, Installation Handbook, and Technical Data Sheet are available for download at: **Schluter.com** or by contacting our Customer Service.



Schluter®-PRIMER-PS
See page 195

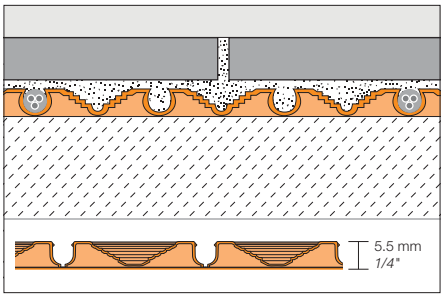

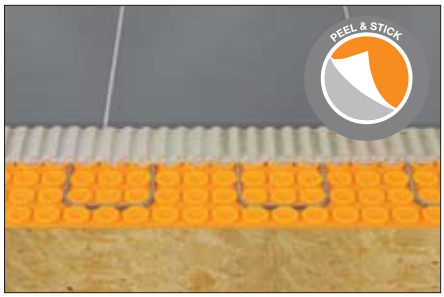



Schluter®-DITRA-HEAT-PS

Peel and stick floor warming

Item No.	Dimensions	Format	$ / ft²*	$ / Unit
DHPS5 12M	0.98 m x 12.76 m = 12.5 m² **3' 2-5/8" x 41' 10-3/4" = 134.5 ft²**	**Roll**	**4.26**	**572.86**
DHPS5 MA	0.98 m x 0.8 m = 0.78 m² **3' 2-5/8" x 2' 7-3/8" = 8.4 ft²**	**Sheet**	**4.41**	**37.08**

* The price per square foot is for estimation purposes only. Please order using the price per roll or per sheet.

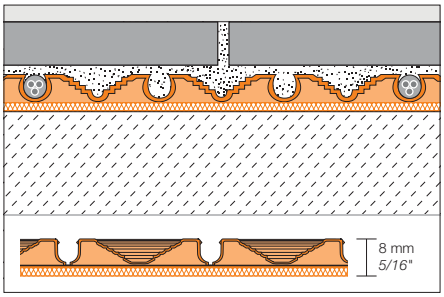

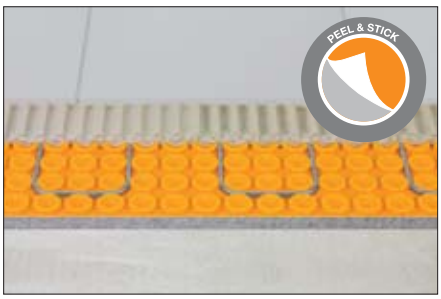

Schluter®-DITRA-HEAT-DUO-PS

Peel and stick floor warming with sound control and thermal break

Item No.	Dimensions	Format	$ / ft²*	$ / Unit
DHDPS8 10M	0.98 m x 10.2 m = 10 m² **3' 2-5/8" x 33' 6-1/2" = 108 ft²**	**Roll**	**6.20**	**669.54**
DHDPS8 MA	0.98 m x 0.8 m = 0.78 m² **3' 2-5/8" x 2' 7-3/8" = 8.4 ft²**	**Sheet**	**6.61**	**55.52**

* The price per square foot is for estimation purposes only. Please order using the price per roll or per sheet.

