
Schluter®-KERDI-BAND

Schluter®-KERDI-BAND is a waterproofing strip used to seal butt joints and floor/wall connections with the Schluter®-KERDI, DITRA, and DITRA-HEAT membranes, as well as joints, corners, and fastener penetrations with the Schluter®-KERDI-BOARD building panels.

Note: 1 mil = 1 one-thousandth of an inch



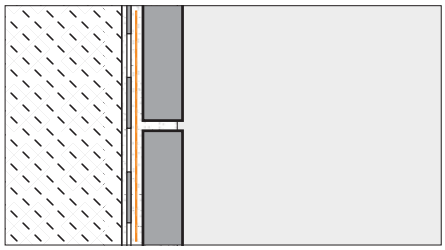


Schluter®-KERDI-BAND					
Waterproofing strip					
Item No.	Width	Length	Thickness	$ / ft *	$ / Roll
125 mm - 5" width					
KEBA 100/125/5M	125 mm - **5"**	5 m - **16' 5"**	4 mil	**1.86**	**30.46**
KEBA 100/125/10M	125 mm - **5"**	10 m - **33'**	4 mil	**1.75**	**57.85**
KEBA 100/125	125 mm - **5"**	30 m - **98' 5"**	4 mil	**1.45**	**142.42**
KEBA100/125/300	125 mm - **5"**	300 m - **984' 3"**	4 mil	**1.30**	**1,281.77**
185 mm - 7-1/4" width					
KEBA 100/185/5M	185 mm - **7-1/4"**	5 m - **16' 5"**	4 mil	**2.43**	**39.86**
KEBA 100/185	185 mm - **7-1/4"**	30 m - **98' 5"**	4 mil	**2.01**	**197.87**
250 mm - 10" width					
KEBA 100/250/5M	250 mm - **10"**	5 m - **16' 5"**	4 mil	**2.97**	**48.80**
KEBA 100/250	250 mm - **10"**	30 m - **98' 5"**	4 mil	**2.59**	**254.57**


***** The price per foot is for estimation purposes only. Please order using the price per roll.

Schluter®-KERDI-KERECK-F

Schluter®-KERDI-KERECK-F are preformed, seamless corners made of Schluter®-KERDI for waterproofing inside and outside corners.

Note: 1 mil = 1 one-thousandth of an inch

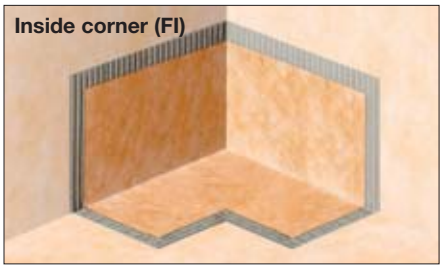

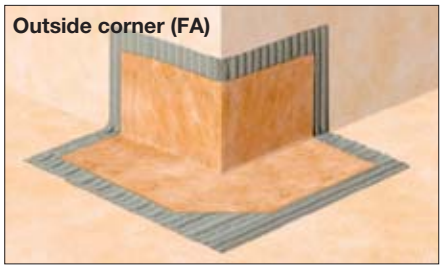


Schluter®-KERDI-KERECK-F			
Waterproofing for 90° corners			
Item No.	Thickness	Packaging	$ / Package
KERECK/FI 2	4 mil	2 Inside corners	**23.15**
KERECK/FA 2	4 mil	2 Outside corners	**23.15**
Waterproofing for 135° corners			
KERECK 135 FI 2	4 mil	2 Inside corners	**23.64**

Schluter®-KERDI-KERECK-F			
Waterproofing for 90° corners			
Item No.	Thickness	Packaging	$ / Package
KERECK/FI 10	4 mil	10 Inside corners	**115.65**
KERECK/FA 10	4 mil	10 Outside corners	**115.65**
Waterproofing for 135° corners			
KERECK 135 FI 10	4 mil	10 Inside corners	**117.04**

Schluter®-KERDI-KERS-B

Schluter®-KERDI-KERS-B are preformed, seamless corners for waterproofing 135° angles between triangular shower benches and walls or for curb corners in neo-angle shower applications.

Note: 1 mil = 1 one-thousandth of an inch

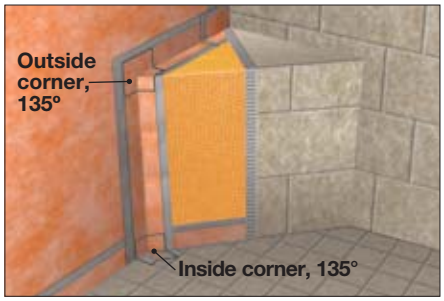


Schluter®-KERDI-KERS-B


Waterproofing corners

Item No.	Thickness	Description	Packaging	$ / Package
KERECK 135 FI 2	4 mil	Inside corner, 135°	2 units	**23.64**
KERECK 135 FI 10	4 mil	Inside corner, 135°	10 units	**117.04**
KERSB 135 K LR	4 mil	Outside corner, 135°	1 right and 1 left	**49.71**
KERSB 135 K 5LR	4 mil	Outside corner, 135°	5 right and 5 left	**236.15**
KERSB 135 K	4 mil	Bench/neo-angle corner kit	1 right and 1 left 135° outside corner, and 2 135° inside corners	**73.37**

Schluter®-KERDI-KERS

Schluter®-KERDI-KERS are preformed, seamless corners made of Schluter®-KERDI for waterproofing floor/wall/shower base connections in curbless shower applications where the Schluter®-KERDI-LINE linear drain is installed adjacent to the wall.

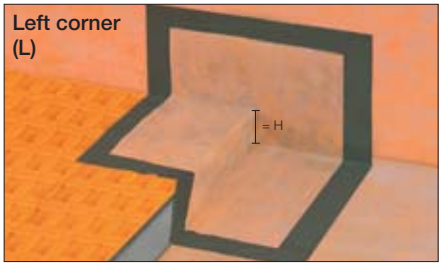

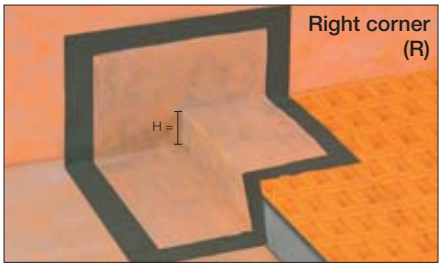

Schluter®-KERDI-KERS

Waterproofing for corners

Item No.	H = mm - in.	Thickness	Description	$ / Unit
KERS 20 L	20 - **3/4**	4 mil	Left inside corner	**28.27**
KERS 28 L	28 - **1-3/32**	4 mil	Left inside corner	**28.27**
KERS 20 R	20 - **3/4**	4 mil	Right inside corner	**28.27**
KERS 28 R	28 - **1-3/32**	4 mil	Right inside corner	**28.27**