FLOOR DRAIN WITH INTEGRATED KERDI COLLAR

Schluter®-KERDI-DRAIN-F

Schluter®-KERDI-DRAIN-F is a floor drain specifically designed to allow connections to Schluter®-DITRA and DITRA-HEAT uncoupling membranes in floor applications. The drain body is available in polypropylene or stainless steel, each with a laminated Schluter®-KERDI collar that ensures a simple connection to the uncoupling membrane on the floor and at wall transitions. KERDI-DRAIN-F features a flat, narrow bonding flange to allow for placement against walls or in corners on floors. It can be combined with virtually any KERDI-DRAIN grate assembly, with the exception of the tileable grate and the 6" *(150 mm)* square and round grates. The grate assembly is sold separately, please refer to pages 134 to 136.







Schluter®-KERDI-DRAIN-F - Floor drain with narrow bonding flange and integrated KERDI collar

Polypropylene



ABS and PVC couplings included

Stainless steel with no-hub outlet



Stainless steel with threaded outlet



Material	Outlet	Item No.	$ / Unit
Polypropylene	50 mm - **2"** NPT	KDF2FL	**96.46**
Stainless Steel	50 mm - **2"** no-hub	KDF2EFL	**325.79**
Stainless Steel	50 mm - **2"** threaded	KDF2ETHFL	**362.59**

Listed by ICC-ES (Report No. PMG-1204), UPC® and CSA.

Additional components included



1x Vertical height adjustment collar




1x Construction cover

i

The tileable grate and the 6" *(150 mm)* round/square grates are not compatible with KERDI-DRAIN-F.

Drain measurements

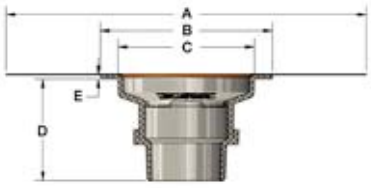

Polypropylene 50 mm (2") outlet	
A	268 mm - **10-9/16"**
B	128 mm - **5-1/32"**
C	101.1 mm - **3-31/32"**
D	75.4 mm - **2-31/32"**
E	3 mm - **1/8"**



Stainless steel 50 mm (2") no-hub outlet	
A	280 mm - **11-1/32"**
B	139 mm - **5-15/32"**
C	98 mm - **3-27/32"**
D	77.2 mm - **3-1/32"**
E	1.5 mm - **1/16"**



Stainless steel 50 mm (2") threaded outlet	
A	280 mm - **11-1/32"**
B	139 mm - **5-15/32"**
C	98 mm - **3-27/32"**
D	73.7 mm - **2-29/32"**
E	1.5 mm - **1/16"**