
Schluter®-RONDEC

Schluter®-RONDEC is a finishing and edge-protection profile for tiled edges and outside corners of tiled surfaces. The reveal of the profile forms a symmetrically rounded corner along the surface edge. RONDEC allows for color coordination with tile and grout and the creation of interesting accents in decorative designs. The profile can be combined with the Schluter®-DESIGNLINE border profile for further design options. RONDEC in aluminum and PVC features an integrated joint spacer that establishes a defined joint cavity between the tile and the profile.





Accessories

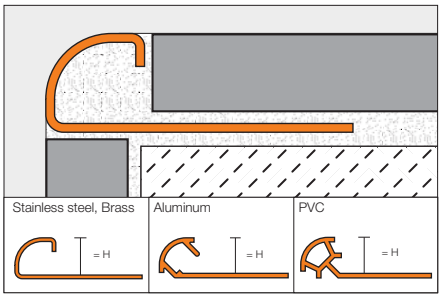








90° Outside corner



90° Inside corner



RONDEC prefabricated corners eliminate the need for a mitered edge.

EV/



ED/



IV/



ID/



Corners with item numbers beginning with EV/ are milled out of solid aluminum and corners with item numbers beginning with ED/ are die cast metal.

90° Double-leg outside corner (E2L/)



90° Double-leg inside corner (I2L/)



Double-leg corners simplify the framing of smaller elements with the RONDEC profile, such as niches, windows, etc. The legs are detachable for use in applications where a single-leg corner is needed.

Sink corner with 3/8" *(10 mm)* radius (I2S/)



Sink corner with 1-1/2" *(38 mm)* radius (ISK/)



Stainless steel sink corners are used with the RONDEC profile to produce tiled-under sinks. The corners have a large radius (3/8" - *10 mm* or 1-1/2" - *38 mm*) that allows them to match up to the contour of most standard sinks. The 3/8" corner piece features a double-leg design for ease of installation, while the 1-1/2" corner includes two stainless steel connectors to maintain the alignment of the corner piece and profiles during installation.

Connector Stainless Steel (V/)



Connector PVC (V/)



RONDEC connectors simplify the alignment of adjacent profile sections. Connectors are made of either PVC for aluminum profiles or stainless steel for stainless steel profiles.

End cap



End caps feature a bendable leg that is inserted into the RONDEC profile, and a brushed stainless steel plate that covers the open area of the profile in applications where the end of the profile is to be left exposed. RONDEC end caps can be used with stainless steel and brushed stainless steel RONDEC profiles.

Stainless Steel 304 (1.4301 = V2A)



Note: RONDEC in sizes 60, 80, 100, and 125 is also available in stainless steel 316L (1.4404 = V4A). Contact customer service for price and availability.

Schluter®-RONDEC

Length = 2.5 m - 8' 2-1/2"	Stainless steel 304 (1.4301 = V2A) (E)							
H = mm - in.	Profile	$ / Length	Outside corner, 90°	$ / Unit	Sink corner 3/8" (10 mm) radius	$ / Unit	Sink corner 1-1/2" (38 mm) radius	$ / Unit
4.5 - 3/16	RO 45 E	62.76	EV/RO 45 E	45.84	-	-	-	-
6 - 1/4	RO 60 E	63.99	EV/RO 60 E	45.74	-	-	-	-
7 - 9/32	RO 70 E	66.58	EV/RO 70 E	47.00	-	-	-	-
8 - 5/16	RO 80 E	67.16	EV/RO 80 E	47.00	I2S/RO 80 E/V2A	59.11	ISK/RO 80 E/38	30.77
9 - 11/32	RO 90 E	71.72	EV/RO 90 E	50.62	-	-	-	-
10 - 3/8	RO 100 E	72.13	EV/RO 100 E	52.77	I2S/RO 100 E/V2A	59.11	ISK/RO 100 E/38	30.77
11 - 7/16	RO 110 E	74.60	EV/RO 110 E	54.22	-	-	-	-
12.5 - 1/2	RO 125 E	77.81	EV/RO 125 E	54.22	I2S/RO 125 E/V2A	59.11	ISK/RO 125 E/38	30.77
15 - 9/16	RO 150 E	88.19	EV/RO 150 E	55.95	-	-	-	-

Length = 2.5 m - 8' 2-1/2"	Brushed stainless steel 304 (1.4301 = V2A) (EB)		Die cast metal with stainless steel appearance		
H = mm - in.	End cap	$ / Unit	Outside corner, 90°	Inside corner, 90°	$ / Unit
6 - 1/4	-	-	ED/RO 60 E	ID/RO 60 E	10.34
8 - 5/16	EK/RO 80 EB	5.47	ED/RO 80 E	ID/RO 80 E	10.34
10 - 3/8	EK/RO 100 EB	5.47	ED/RO 100 E	ID/RO 100 E	10.34
12.5 - 1/2	EK/RO 125 EB	5.47	ED/RO 125 E	ID/RO 125 E	10.34

Length = 2.5 m - 8' 2-1/2"	Brushed stainless steel 304 (1.4301 = V2A) (EB)							
H = mm - in.	Profile	$ / Length	Outside corner, 90°	$ / Unit	Sink corner 3/8" (10 mm) radius	$ / Unit	End cap	$ / Unit
6 - 1/4	RO 60 EB	97.68	EV/RO 60 EB	51.37	-	-	-	-
7 - 9/32	RO 70 EB	99.61	EV/RO 70 EB	51.37	-	-	-	-
8 - 5/16	RO 80 EB	102.07	EV/RO 80 EB	51.37	I2S/RO 80 EB/V2A	59.11	EK/RO 80 EB	5.47
9 - 11/32	RO 90 EB	104.12	EV/RO 90 EB	51.37	-	-	-	-
10 - 3/8	RO 100 EB	106.62	EV/RO 100 EB	55.90	I2S/RO 100 EB/V2A	59.11	EK/RO 100 EB	5.47
11 - 7/16	RO 110 EB	108.76	EV/RO 110 EB	55.90	-	-	-	-
12.5 - 1/2	RO 125 EB	111.25	EV/RO 125 EB	55.90	I2S/RO 125 EB/V2A	59.11	EK/RO 125 EB	5.47
15 - 9/16	RO 150 EB	122.41	EV/RO 150 EB	58.92	-	-	-	-

Stainless steel 304 (1.4301 = V2A) (E)		
H = mm - in.	Connector	$ / Unit
6 - 1/4	V/RO 60 E	6.76
8 - 5/16	V/RO 80 E	6.76
10 - 3/8	V/RO 100 E	6.76
11 - 7/16	V/RO 110 E	6.76
12.5 - 1/2	V/RO 125 E	6.76

Brass



Schluter®-RONDEC

Length = 2.5 m - 8' 2-1/2"	Chrome-plated solid brass (MC)		Aluminum with polished chrome finish		
H = mm - in.	Profile	$ / Length	Outside corner, 90°	Inside corner, 90°	$ / Unit
6 - 1/4	RO 60 MC	169.22	EV/RO 60 ACG	IV/RO 60 ACG	12.15
8 - 5/16	RO 80 MC	178.93	EV/RO 80 ACG	IV/RO 80 ACG	12.15
10 - 3/8	RO 100 MC	186.69	EV/RO 100 ACG	IV/RO 100 ACG	12.15
12.5 - 1/2	RO 125 MC	196.65	EV/RO 125 ACG	IV/RO 125 ACG	12.15

Anodized Aluminum



Schluter®-RONDEC

Length = 2.5 m - 8' 2-1/2"	Satin anodized aluminum (AE)						
H = mm - in.	Profile	$ / Length	Outside corner, 90°	Inside corner, 90°	$ / Unit	Connector	$ / Unit
6 - 1/4	RO 60 AE	20.71	EV/RO 60 AE	IV/RO 60 AE	10.43	V/RO 60	2.84
8 - 5/16	RO 80 AE	22.21	EV/RO 80 AE	IV/RO 80 AE	10.43	V/RO 80	2.84
10 - 3/8	RO 100 AE	23.16	EV/RO 100 AE	IV/RO 100 AE	10.43	V/RO 100	2.84
12.5 - 1/2	RO 125 AE	27.27	EV/RO 125 AE	IV/RO 125 AE	10.43	V/RO 125	2.84

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°	$ / Unit
8 - 5/16	E2L/RO 80 AE	I2L/RO 80 AE	18.07
10 - 3/8	E2L/RO 100 AE	I2L/RO 100 AE	18.07
12.5 - 1/2	E2L/RO 125 AE	I2L/RO 125 AE	18.07

Length = 2.5 m - 8' 2-1/2"	Polished chrome anod. alu. (ACG)						
H = mm - in.	Profile	$ / Length	Outside corner, 90°	Inside corner, 90°	$ / Unit	Connector	$ / Unit
6 - 1/4	RO 60 ACG	24.95	EV/RO 60 ACG	IV/RO 60 ACG	12.15	V/RO 60	2.84
8 - 5/16	RO 80 ACG	26.49	EV/RO 80 ACG	IV/RO 80 ACG	12.15	V/RO 80	2.84
10 - 3/8	RO 100 ACG	28.09	EV/RO 100 ACG	IV/RO 100 ACG	12.15	V/RO 100	2.84
12.5 - 1/2	RO 125 ACG	32.73	EV/RO 125 ACG	IV/RO 125 ACG	12.15	V/RO 125	2.84

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°	$ / Unit
8 - 5/16	E2L/RO 80 ACG	I2L/RO 80 ACG	18.43
10 - 3/8	E2L/RO 100 ACG	I2L/RO 100 ACG	18.43
12.5 - 1/2	E2L/RO 125 ACG	I2L/RO 125 ACG	18.43

Length = 2.5 m - 8' 2-1/2"	Brushed chrome anod. alu. (ACGB)						
H = mm - in.	Profile	$ / Length	Outside corner, 90°	Inside corner, 90°	$ / Unit	Connector	$ / Unit
6 - 1/4	RO 60 ACGB	25.84	EV/RO 60 ACGB	IV/RO 60 ACGB	20.21	V/RO 60	2.84
8 - 5/16	RO 80 ACGB	28.89	EV/RO 80 ACGB	IV/RO 80 ACGB	20.21	V/RO 80	2.84
10 - 3/8	RO 100 ACGB	30.74	EV/RO 100 ACGB	IV/RO 100 ACGB	20.21	V/RO 100	2.84
12.5 - 1/2	RO 125 ACGB	35.73	EV/RO 125 ACGB	IV/RO 125 ACGB	20.21	V/RO 125	2.84

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°	$ / Unit
8 - 5/16	E2L/RO 80 ACGB	I2L/RO 80 ACGB	22.72
10 - 3/8	E2L/RO 100 ACGB	I2L/RO 100 ACGB	22.72
12.5 - 1/2	E2L/RO 125 ACGB	I2L/RO 125 ACGB	22.72

Schluter®-RONDEC

Length = 2.5 m - 8' 2-1/2"	Satin nickel anod. alu. (AT)						
H = mm - in.	Profile	$ / Length	Outside corner, 90°	Inside corner, 90°	$ / Unit	Connector	$ / Unit
6 - 1/4	RO 60 AT	22.67	EV/RO 60 AT	IV/RO 60 AT	10.99	V/RO 60	2.84
8 - 5/16	RO 80 AT	24.99	EV/RO 80 AT	IV/RO 80 AT	10.99	V/RO 80	2.84
10 - 3/8	RO 100 AT	26.02	EV/RO 100 AT	IV/RO 100 AT	10.99	V/RO 100	2.84
12.5 - 1/2	RO 125 AT	30.22	EV/RO 125 AT	IV/RO 125 AT	10.99	V/RO 125	2.84

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°	$ / Unit
8 - 5/16	E2L/RO 80 AT	I2L/RO 80 AT	18.23
10 - 3/8	E2L/RO 100 AT	I2L/RO 100 AT	18.23
12.5 - 1/2	E2L/RO 125 AT	I2L/RO 125 AT	18.23

Length = 2.5 m - 8' 2-1/2"	Polished nickel anod. alu. (ATG)						
H = mm - in.	Profile	$ / Length	Outside corner, 90°	Inside corner, 90°	$ / Unit	Connector	$ / Unit
6 - 1/4	RO 60 ATG	26.20	EV/RO 60 ATG	IV/RO 60 ATG	12.15	V/RO 60	2.84
8 - 5/16	RO 80 ATG	27.82	EV/RO 80 ATG	IV/RO 80 ATG	12.15	V/RO 80	2.84
10 - 3/8	RO 100 ATG	29.59	EV/RO 100 ATG	IV/RO 100 ATG	12.15	V/RO 100	2.84
12.5 - 1/2	RO 125 ATG	34.51	EV/RO 125 ATG	IV/RO 125 ATG	12.15	V/RO 125	2.84

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°	$ / Unit
8 - 5/16	E2L/RO 80 ATG	I2L/RO 80 ATG	18.43
10 - 3/8	E2L/RO 100 ATG	I2L/RO 100 ATG	18.43
12.5 - 1/2	E2L/RO 125 ATG	I2L/RO 125 ATG	18.43

Length = 2.5 m - 8' 2-1/2"	Brushed nickel anod. alu. (ATGB)						
H = mm - in.	Profile	$ / Length	Outside corner, 90°	Inside corner, 90°	$ / Unit	Connector	$ / Unit
6 - 1/4	RO 60 ATGB	27.76	EV/RO 60 ATGB	IV/RO 60 ATGB	19.85	V/RO 60	2.84
8 - 5/16	RO 80 ATGB	29.42	EV/RO 80 ATGB	IV/RO 80 ATGB	19.85	V/RO 80	2.84
10 - 3/8	RO 100 ATGB	30.75	EV/RO 100 ATGB	IV/RO 100 ATGB	19.85	V/RO 100	2.84
12.5 - 1/2	RO 125 ATGB	36.52	EV/RO 125 ATGB	IV/RO 125 ATGB	19.85	V/RO 125	2.84

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°	$ / Unit
8 - 5/16	E2L/RO 80 ATGB	I2L/RO 80 ATGB	22.72
10 - 3/8	E2L/RO 100 ATGB	I2L/RO 100 ATGB	22.72
12.5 - 1/2	E2L/RO 125 ATGB	I2L/RO 125 ATGB	22.72

Length = 2.5 m - 8' 2-1/2"	Satin copper anod. alu. (AK)						
H = mm - in.	Profile	$ / Length	Outside corner, 90°	Inside corner, 90°	$ / Unit	Connector	$ / Unit
6 - 1/4	RO 60 AK	22.67	EV/RO 60 AK	IV/RO 60 AK	10.99	V/RO 60	2.84
8 - 5/16	RO 80 AK	24.99	EV/RO 80 AK	IV/RO 80 AK	10.99	V/RO 80	2.84
10 - 3/8	RO 100 AK	26.53	EV/RO 100 AK	IV/RO 100 AK	10.99	V/RO 100	2.84
12.5 - 1/2	RO 125 AK	30.22	EV/RO 125 AK	IV/RO 125 AK	10.99	V/RO 125	2.84

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°	$ / Unit
8 - 5/16	E2L/RO 80 AK	I2L/RO 80 AK	18.07
10 - 3/8	E2L/RO 100 AK	I2L/RO 100 AK	18.07
12.5 - 1/2	E2L/RO 125 AK	I2L/RO 125 AK	18.07

Schluter®-RONDEC

Length = 2.5 m - 8' 2-1/2"	Polished copper anod. alu. (AKG)						
H = mm - in.	Profile	$ / Length	Outside corner, 90°	Inside corner, 90°	$ / Unit	Connector	$ / Unit
6 - 1/4	RO 60 AKG	26.20	EV/RO 60 AKG	IV/RO 60 AKG	12.06	V/RO 60	2.84
8 - 5/16	RO 80 AKG	27.82	EV/RO 80 AKG	IV/RO 80 AKG	12.06	V/RO 80	2.84
10 - 3/8	RO 100 AKG	29.59	EV/RO 100 AKG	IV/RO 100 AKG	12.06	V/RO 100	2.84
12.5 - 1/2	RO 125 AKG	34.51	EV/RO 125 AKG	IV/RO 125 AKG	12.06	V/RO 125	2.84

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°	$ / Unit
8 - 5/16	E2L/RO 80 AKG	I2L/RO 80 AKG	18.23
10 - 3/8	E2L/RO 100 AKG	I2L/RO 100 AKG	18.23
12.5 - 1/2	E2L/RO 125 AKG	I2L/RO 125 AKG	18.23

Length = 2.5 m - 8' 2-1/2"	Brushed copper anod. alu. (AKGB)						
H = mm - in.	Profile	$ / Length	Outside corner, 90°	Inside corner, 90°	$ / Unit	Connector	$ / Unit
6 - 1/4	RO 60 AKGB	27.76	EV/RO 60 AKGB	IV/RO 60 AKGB	20.21	V/RO 60	2.84
8 - 5/16	RO 80 AKGB	29.42	EV/RO 80 AKGB	IV/RO 80 AKGB	20.21	V/RO 80	2.84
10 - 3/8	RO 100 AKGB	31.33	EV/RO 100 AKGB	IV/RO 100 AKGB	20.21	V/RO 100	2.84
12.5 - 1/2	RO 125 AKGB	36.52	EV/RO 125 AKGB	IV/RO 125 AKGB	20.21	V/RO 125	2.84

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°	$ / Unit
8 - 5/16	E2L/RO 80 AKGB	I2L/RO 80 AKGB	22.51
10 - 3/8	E2L/RO 100 AKGB	I2L/RO 100 AKGB	22.51
12.5 - 1/2	E2L/RO 125 AKGB	I2L/RO 125 AKGB	22.51

Length = 2.5 m - 8' 2-1/2"	Brushed antique bronze anod. alu. (ABGB)						
H = mm - in.	Profile	$ / Length	Outside corner, 90°	Inside corner, 90°	$ / Unit	Connector	$ / Unit
6 - 1/4	RO 60 ABGB	27.76	EV/RO 60 ABGB	IV/RO 60 ABGB	20.21	V/RO 60	2.84
8 - 5/16	RO 80 ABGB	29.42	EV/RO 80 ABGB	IV/RO 80 ABGB	20.21	V/RO 80	2.84
10 - 3/8	RO 100 ABGB	31.33	EV/RO 100 ABGB	IV/RO 100 ABGB	20.21	V/RO 100	2.84
12.5 - 1/2	RO 125 ABGB	36.52	EV/RO 125 ABGB	IV/RO 125 ABGB	20.21	V/RO 125	2.84

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°	$ / Unit
8 - 5/16	E2L/RO 80 ABGB	I2L/RO 80 ABGB	22.51
10 - 3/8	E2L/RO 100 ABGB	I2L/RO 100 ABGB	22.51
12.5 - 1/2	E2L/RO 125 ABGB	I2L/RO 125 ABGB	22.51

Length = 2.5 m - 8' 2-1/2"	Satin brass anod. alu. (AM)						
H = mm - in.	Profile	$ / Length	Outside corner, 90°	Inside corner, 90°	$ / Unit	Connector	$ / Unit
6 - 1/4	RO 60 AM	21.14	EV/RO 60 AM	IV/RO 60 AM	10.99	V/RO 60	2.84
8 - 5/16	RO 80 AM	24.54	EV/RO 80 AM	IV/RO 80 AM	10.99	V/RO 80	2.84
10 - 3/8	RO 100 AM	26.05	EV/RO 100 AM	IV/RO 100 AM	10.99	V/RO 100	2.84
12.5 - 1/2	RO 125 AM	29.69	EV/RO 125 AM	IV/RO 125 AM	10.99	V/RO 125	2.84

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°	$ / Unit
8 - 5/16	E2L/RO 80 AM	I2L/RO 80 AM	18.07
10 - 3/8	E2L/RO 100 AM	I2L/RO 100 AM	18.07
12.5 - 1/2	E2L/RO 125 AM	I2L/RO 125 AM	18.07

Schluter®-RONDEC

Length = 2.5 m - 8' 2-1/2"	Polished brass anod. alu. (AMG)						
H = mm - in.	Profile	$ / Length	Outside corner, 90°	Inside corner, 90°	$ / Unit	Connector	$ / Unit
6 - 1/4	RO 60 AMG	25.20	EV/RO 60 AMG	IV/RO 60 AMG	12.06	V/RO 60	2.84
8 - 5/16	RO 80 AMG	26.75	EV/RO 80 AMG	IV/RO 80 AMG	12.06	V/RO 80	2.84
10 - 3/8	RO 100 AMG	28.38	EV/RO 100 AMG	IV/RO 100 AMG	12.06	V/RO 100	2.84
12.5 - 1/2	RO 125 AMG	33.04	EV/RO 125 AMG	IV/RO 125 AMG	12.06	V/RO 125	2.84

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°	$ / Unit
8 - 5/16	E2L/RO 80 AMG	I2L/RO 80 AMG	18.07
10 - 3/8	E2L/RO 100 AMG	I2L/RO 100 AMG	18.07
12.5 - 1/2	E2L/RO 125 AMG	I2L/RO 125 AMG	18.07

Length = 2.5 m - 8' 2-1/2"	Brushed brass anod. alu. (AMGB)						
H = mm - in.	Profile	$ / Length	Outside corner, 90°	Inside corner, 90°	$ / Unit	Connector	$ / Unit
6 - 1/4	RO 60 AMGB	27.21	EV/RO 60 AMGB	IV/RO 60 AMGB	20.77	V/RO 60	2.84
8 - 5/16	RO 80 AMGB	28.89	EV/RO 80 AMGB	IV/RO 80 AMGB	20.77	V/RO 80	2.84
10 - 3/8	RO 100 AMGB	30.74	EV/RO 100 AMGB	IV/RO 100 AMGB	20.77	V/RO 100	2.84
12.5 - 1/2	RO 125 AMGB	35.73	EV/RO 125 AMGB	IV/RO 125 AMGB	20.77	V/RO 125	2.84

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°	$ / Unit
8 - 5/16	E2L/RO 80 AMGB	I2L/RO 80 AMGB	22.72
10 - 3/8	E2L/RO 100 AMGB	I2L/RO 100 AMGB	22.72
12.5 - 1/2	E2L/RO 125 AMGB	I2L/RO 125 AMGB	22.72

Length = 2.5 m - 8' 2-1/2"	Graphite anod. alu. (AGR)						
H = mm - in.	Profile	$ / Length	Outside corner, 90°	Inside corner, 90°	$ / Unit	Connector	$ / Unit
6 - 1/4	RO 60 AGR	23.53	EV/RO 60 AGR	IV/RO 60 AGR	11.10	V/RO 60	2.84
8 - 5/16	RO 80 AGR	25.92	EV/RO 80 AGR	IV/RO 80 AGR	11.10	V/RO 80	2.84
10 - 3/8	RO 100 AGR	27.52	EV/RO 100 AGR	IV/RO 100 AGR	11.10	V/RO 100	2.84
12.5 - 1/2	RO 125 AGR	31.37	EV/RO 125 AGR	IV/RO 125 AGR	11.10	V/RO 125	2.84

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°	$ / Unit
8 - 5/16	E2L/RO 80 AGR	I2L/RO 80 AGR	18.23
10 - 3/8	E2L/RO 100 AGR	I2L/RO 100 AGR	18.23
12.5 - 1/2	E2L/RO 125 AGR	I2L/RO 125 AGR	18.23

Length = 2.5 m - 8' 2-1/2"	Bright black anod. alu. (AGSG)						
H = mm - in.	Profile	$ / Length	Outside corner, 90°	Inside corner, 90°	$ / Unit	Connector	$ / Unit
6 - 1/4	RO 60 AGSG	27.71	EV/RO 60 AGSG	IV/RO 60 AGSG	12.65	V/RO 60	2.84
8 - 5/16	RO 80 AGSG	29.44	EV/RO 80 AGSG	IV/RO 80 AGSG	12.65	V/RO 80	2.84
10 - 3/8	RO 100 AGSG	31.30	EV/RO 100 AGSG	IV/RO 100 AGSG	12.65	V/RO 100	2.84
12.5 - 1/2	RO 125 AGSG	36.50	EV/RO 125 AGSG	IV/RO 125 AGSG	12.65	V/RO 125	2.84

H = mm - in.	Double-leg outside corner, 90°	Double-leg inside corner, 90°	$ / Unit
8 - 5/16	E2L/RO 80 AGSG	I2L/RO 80 AGSG	18.57
10 - 3/8	E2L/RO 100 AGSG	I2L/RO 100 AGSG	18.57
12.5 - 1/2	E2L/RO 125 AGSG	I2L/RO 125 AGSG	18.57

Schluter®-RONDEC

Length = 2.5 m - **8' 2-1/2"**	Brushed black anod. alu. (AGSB)						
H = mm **- in.**	**Profile**	**$ / Length**	**Outside corner, 90°**	**Inside corner, 90°**	**$ / Unit**	**Connector**	**$ / Unit**
6 - **1/4**	RO 60 AGSB	**27.67**	EV/RO 60 AGSB	IV/RO 60 AGSB	**20.41**	V/RO 60	**2.84**
8 - **5/16**	RO 80 AGSB	**30.87**	EV/RO 80 AGSB	IV/RO 80 AGSB	**20.41**	V/RO 80	**2.84**
10 - **3/8**	RO 100 AGSB	**32.86**	EV/RO 100 AGSB	IV/RO 100 AGSB	**20.41**	V/RO 100	**2.84**
12.5 - **1/2**	RO 125 AGSB	**38.29**	EV/RO 125 AGSB	IV/RO 125 AGSB	**20.41**	V/RO 125	**2.84**

H = mm **- in.**	**Double-leg outside corner, 90°**	**Double-leg inside corner, 90°**	**$ / Unit**
8 - **5/16**	E2L/RO 80 AGSB	I2L/RO 80 AGSB	**22.51**
10 - **3/8**	E2L/RO 100 AGSB	I2L/RO 100 AGSB	**22.51**
12.5 - **1/2**	E2L/RO 125 AGSB	I2L/RO 125 AGSB	**22.51**

10-foot *(3.05 m)* RONDEC Profiles – Anodized Aluminum

Length = 3.05 m - **10'**	Satin anod. alu. (AE)		Polished chrome anod. alu. (ACG)		Satin nickel anod. alu. (AT)	
H = mm **- in.**	**Profile**	**$ / Length**	**Profile**	**$ / Length**	**Profile**	**$ / Length**
8 - **5/16**	RO 80 AE / 300	**27.83**	RO 80 ACG / 300	**33.15**	RO 80 AT / 300	**31.19**
10 - **3/8**	RO 100 AE / 300	**29.00**	RO 100 ACG / 300	**35.11**	RO 100 AT / 300	**32.53**
12.5 - **1/2**	RO 125 AE / 300	**34.04**	RO 125 ACG / 300	**40.85**	RO 125 AT / 300	**37.86**

Special shipping conditions apply, see pages 207 - 208.



RONDEC in brushed chrome (page 32)

Schluter®-TRENDLINE Textured Color-coated Aluminum



Schluter®-RONDEC							
Length = 2.5 m - **8' 2-1/2"**	Textured color-coated aluminum (TS)						
H = mm **- in.**	**Profile**	**$ / Length**	**Outside corner, 90°**	**Inside corner, 90°**	**$ / Unit**	**Connector**	**$ / Unit**
6 - **1/4**	RO 60 + **color***	**51.96**	EV/RO 60 + **color***	IV/RO 60 + **color***	**18.52**	V/RO 60	**2.84**
8 - **5/16**	RO 80 + **color***	**53.01**	EV/RO 80 + **color***	IV/RO 80 + **color***	**18.52**	V/RO 80	**2.84**
10 - **3/8**	RO 100 + **color***	**54.75**	EV/RO 100 + **color***	IV/RO 100 + **color***	**18.52**	V/RO 100	**2.84**
11 - **7/16**	RO 110 + **color***	**55.35**	EV/RO 110 + **color***	IV/RO 110 + **color***	**18.52**	V/RO 110	**2.84**
12.5 - **1/2**	RO 125 + **color***	**55.92**	EV/RO 125 + **color***	IV/RO 125 + **color***	**18.52**	V/RO 125	**2.84**

*Color Codes

TSI Ivory · TSBG Greige · TSSG Stone grey · TSC Cream · TSB Beige · TSR Rustic brown · TSOB Bronze · TSG Pewter · TSLA Light anthracite · TSDA Dark anthracite

* To complete the item number, add the **color** code (e.g., RO 60 **TSC**).

Matte White and Matte Black

Length = 2.5 m - **8' 2-1/2"**	Matte color-coated aluminum						
H = mm **- in.**	**Profile**	**$ / Length**	**Outside corner, 90° (die cast)**	**Inside corner, 90° (die cast)**	**$ / Unit**	**Connector**	**$ / Unit**
6 - **1/4**	RO 60 + **color***	**41.58**	ED/RO 60 + **color***	ID/RO 60 + **color***	**12.95**	V/RO 60	**2.84**
8 - **5/16**	RO 80 + **color***	**42.40**	ED/RO 80 + **color***	ID/RO 80 + **color***	**12.95**	V/RO 80	**2.84**
10 - **3/8**	RO 100 + **color***	**43.82**	ED/RO 100 + **color***	ID/RO 100 + **color***	**12.95**	V/RO 100	**2.84**
11 - **7/16**	RO 110 + **color***	**44.29**	ED/RO 110 + **color***	ID/RO 110 + **color***	**12.95**	V/RO 110	**2.84**
12.5 - **1/2**	RO 125 + **color***	**44.74**	ED/RO 125 + **color***	ID/RO 125 + **color***	**12.95**	V/RO 125	**2.84**

*Color Codes

MBW Matte white · MGS Matte black

* To complete the item number, add the **color** code (e.g., RO 60 **MGS**).

10-foot *(3.05 m)* RONDEC Profiles – Textured Color-coated Aluminum						
Length = 3.05 m - **10'**	Textured color-coated aluminum (TS)		Matte white (MBW)		Matte black (MGS)	
H = mm **- in.**	**Profile**	**$ / Length**	**Profile**	**$ / Length**	**Profile**	**$ / Length**
6 - **1/4**	RO 60 + **color*** / 300	**64.95**	RO 60 MBW / 300	**51.97**	RO 60 MGS / 300	**51.97**
8 - **5/16**	RO 80 + **color*** / 300	**66.24**	RO 80 MBW / 300	**53.02**	RO 80 MGS / 300	**53.02**
10 - **3/8**	RO 100 + **color*** / 300	**68.43**	RO 100 MBW / 300	**54.77**	RO 100 MGS / 300	**54.77**
11 - **7/16**	RO 110 + **color*** / 300	**69.19**	RO 110 MBW / 300	**55.35**	RO 110 MGS / 300	**55.35**
12.5 - **1/2**	RO 125 + **color*** / 300	**69.89**	RO 125 MBW / 300	**55.92**	RO 125 MGS / 300	**55.92**

Special shipping conditions apply, see pages 207 - 208.

Color-coated Aluminum

Schluter®-RONDEC

Length = 2.5 m - **8' 2-1/2"**	Color-coated aluminum (AC)						
H = mm **- in.**	**Profile**	**$ / Length**	**Outside corner, 90° (die cast)**	**Inside corner, 90° (die cast)**	**$ / Unit**	**Connector**	**$ / Unit**
6 - **1/4**	RO 60 + **color***	**23.41**	ED/RO 60 + **color***	ID/RO 60 + **color***	**6.21**	V/RO 60	**2.84**
8 - **5/16**	RO 80 + **color***	**26.31**	ED/RO 80 + **color***	ID/RO 80 + **color***	**6.21**	V/RO 80	**2.84**
10 - **3/8**	RO 100 + **color***	**29.65**	ED/RO 100 + **color***	ID/RO 100 + **color***	**6.21**	V/RO 100	**2.84**
12.5 - **1/2**	RO 125 + **color***	**36.03**	ED/RO 125 + **color***	ID/RO 125 + **color***	**6.21**	V/RO 125	**2.84**

*Color Codes

BW Bright white · W White · SP Sand pebble · BH Bahama · HB Light beige · HG Light grey · PG Classic grey · G Grey · GM Metallic grey · SB Black brown · GS Black

* To complete the item number, add the **color** code (e.g., RO 60 **G**).

PVC

Length = 2.5 m - **8' 2-1/2"**	PVC (P)				
H = mm **- in.**	**Profile**	**$ / Length**	**Outside corner, 90°**	**Inside corner, 90°**	**$ / Unit**
6 - **1/4**	PRO 60 + **color***	**8.69**	E/PRO 60 + **color***	I/PRO 60 + **color***	**3.54**
8 - **5/16**	PRO 80 + **color***	**8.84**	E/PRO 80 + **color***	I/PRO 80 + **color***	**3.54**
10 - **3/8**	PRO 100 + **color***	**9.42**	E/PRO 100 + **color***	I/PRO 100 + **color***	**3.54**
11 - **7/16**	PRO 110 + **color***	**10.15**	E/PRO 110 + **color***	I/PRO 110 + **color***	**3.54**
12.5 - **1/2**	PRO 125 + **color***	**10.57**	E/PRO 125 + **color***	I/PRO 125 + **color***	**3.54**

*Color Codes

BW Bright white · W White · SP Sand pebble · BH Bahama · HB Light beige · HG Light grey · PG Classic grey · G Grey · GS Black

* To complete the item number, add the **color** code (e.g., PRO 60 **G**).



RONDEC in matte white (page 37)