
Schluter®-VINPRO-S

Schluter®-VINPRO-S is designed to provide edging for resilient coverings (e.g., LVT). Typical applications include edge protection where the resilient covering is bordered by carpet, floor coverings of similar heights, or as a finishing edge to wall skirting applications. The profile features a 1/4" *(6 mm)* or 7/16" *(11 mm)* wide sloped top flange to hide the cut edge of the resilient floor covering, providing a finished look.





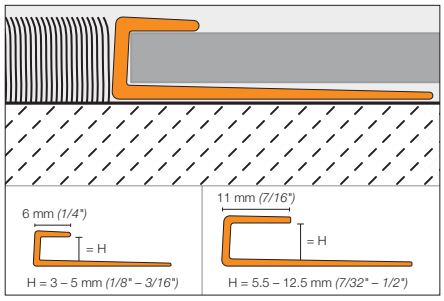


Schluter®-VINPRO-S

Length = 2.5 m - **8' 2-1/2"**	Brushed chrome anod. alu. (ACGB)		Brushed nickel anod. alu. (ATGB)		Brushed antique bronze anod. alu. (ABGB)	
H = mm - **in.**	Item No.	$ / Length	Item No.	$ / Length	Item No.	$ / Length
3 - **1/8**	VPS 30 ACGB	**22.75**	VPS 30 ATGB	**24.14**	VPS 30 ABGB	**25.45**
4 - **5/32**	VPS 40 ACGB	**22.87**	VPS 40 ATGB	**24.40**	VPS 40 ABGB	**25.76**
5 - **3/16**	VPS 50 ACGB	**23.08**	VPS 50 ATGB	**24.61**	VPS 50 ABGB	**26.06**
5.5 - **7/32**	VPSL 55 ACGB	**28.24**	VPSL 55 ATGB	**29.62**	VPSL 55 ABGB	**30.66**
6 - **1/4**	VPSL 60 ACGB	**28.53**	VPSL 60 ATGB	**29.91**	VPSL 60 ABGB	**30.97**
6.5 - **17/64**	VPSL 65 ACGB	**28.80**	VPSL 65 ATGB	**30.21**	VPSL 65 ABGB	**31.28**
7 - **9/32**	VPSL 70 ACGB	**29.09**	VPSL 70 ATGB	**30.52**	VPSL 70 ABGB	**31.59**
7.5 - **19/64**	VPSL 75 ACGB	**29.39**	VPSL 75 ATGB	**30.82**	VPSL 75 ABGB	**31.90**
8 - **5/16**	VPSL 80 ACGB	**29.68**	VPSL 80 ATGB	**31.14**	VPSL 80 ABGB	**32.22**
8.5 - **21/64**	VPSL 85 ACGB	**29.98**	VPSL 85 ATGB	**31.44**	VPSL 85 ABGB	**32.56**
9 - **11/32**	VPSL 90 ACGB	**30.27**	VPSL 90 ATGB	**31.75**	VPSL 90 ABGB	**32.87**
10 - **3/8**	VPSL 100 ACGB	**30.59**	VPSL 100 ATGB	**32.08**	VPSL 100 ABGB	**33.20**
11 - **7/16**	VPSL 110 ACGB	**30.88**	VPSL 110 ATGB	**32.39**	VPSL 110 ABGB	**33.52**
12.5 - **1/2**	VPSL 125 ACGB	**31.20**	VPSL 125 ATGB	**32.71**	VPSL 125 ABGB	**33.86**

Schluter®-VINPRO-T

Schluter®-VINPRO-T is designed to provide transitions between same-height resilient floor coverings, (e.g., LVT) primarily in retrofit applications.

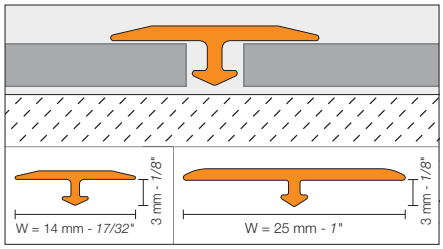



Schluter®-VINPRO-T

Length = 2.5 m - **8' 2-1/2"**	Brushed chrome anod. alu. (ACGB)		Brushed nickel anod. alu. (ATGB)		Brushed antique bronze anod. alu. (ABGB)	
W = mm - **in.**	Item No.	$ / Length	Item No.	$ / Length	Item No.	$ / Length
14 - **17/32**	VPT 3/14 ACGB	**18.57**	VPT 3/14 ATGB	**18.57**	VPT 3/14 ABGB	**18.57**
25 - **1**	VPTL 3/25 ACGB	**23.24**	VPTL 3/25 ATGB	**23.24**	VPTL 3/25 ABGB	**23.24**

Schluter®-VINPRO-U

Schluter®-VINPRO-U s designed to provide a smooth transition between resilient floor coverings (e.g. LVT) and floor coverings at lower elevations or finished concrete. The profile features a 1/4" *(6 mm)* or 7/16" *(11 mm)* wide sloped top flange to hide the cut edge of the resilient floor covering, providing a finished look.

ADA-Compliant

In installations where the leading edge abuts a lower surface covering, all sizes of VINPRO-U are compliant with the Americans with Disabilities Act (ADA). In installations where the leading edge rests on top of the lower floor covering (e.g., finished concrete), the 7/16" *(11 mm)* and 1/2" *(12.5 mm)* sizes are not ADA-compliant.

Technical Note: ADA requirements regarding transitions between surfaces of different heights:

- Up to 6 mm *(1/4")* - no special requirements
- 6 mm *(1/4")* to 12.5 mm *(1/2")* - slope ratio, 1:2
- More than 12.5 mm *(1/2")* - slope ratio, 1:12


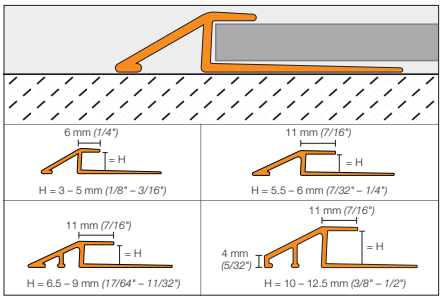




Diagram Values

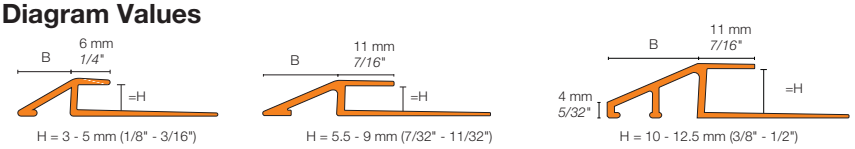


H = mm - **in**	**B** = mm - **in**
3 - **1/8**	8 - **5/16**
4 - **5/32**	9.5 - **3/8**
5 - **3/16**	11.5 - **29/64**
5.5 - **7/32**	15.4 - **19/32**
6 - **1/4**	16.5 - **21/32**
6.5 - **17/64**	17.5 - **11/16**
7 - **9/32**	18.6 - **47/64**
7.5 - **19/64**	19.7 - **25/32**
8 - **5/16**	20.8 - **13/16**
8.5 - **21/64**	21.8 - **55/64**
9 - **11/32**	22.9 - **29/32**
10 - **3/8**	19.2 - **49/64**
11 - **7/16**	21.5 - **27/32**
12.5 - **1/2**	24.7 - **31/32**

Schluter®-VINPRO-U

Length = 2.5 m - **8' 2-1/2"**	Brushed chrome anod. alu. (ACGB)		Brushed nickel anod. alu. (ATGB)		Brushed antique bronze anod. alu. (ABGB)	
H = mm - **in.**	Item No.	$ / Length	Item No.	$ / Length	Item No.	$ / Length
3 - **1/8**	VPU 30 ACGB	**26.37**	VPU 30 ATGB	**28.34**	VPU 30 ABGB	**29.42**
4 - **5/32**	VPU 40 ACGB	**27.00**	VPU 40 ATGB	**28.67**	VPU 40 ABGB	**30.08**
5 - **3/16**	VPU 50 ACGB	**27.89**	VPU 50 ATGB	**29.57**	VPU 50 ABGB	**30.99**
5.5 - **7/32**	VPUL 55 ACGB	**40.60**	VPUL 55 ATGB	**43.60**	VPUL 55 ABGB	**44.66**
6 - **1/4**	VPUL 60 ACGB	**41.81**	VPUL 60 ATGB	**44.91**	VPUL 60 ABGB	**46.01**
6.5 - **17/64**	VPUL 65 ACGB	**43.07**	VPUL 65 ATGB	**46.25**	VPUL 65 ABGB	**47.38**
7 - **9/32**	VPUL 70 ACGB	**44.35**	VPUL 70 ATGB	**47.64**	VPUL 70 ABGB	**48.80**
7.5 - **19/64**	VPUL 75 ACGB	**45.68**	VPUL 75 ATGB	**49.07**	VPUL 75 ABGB	**50.28**
8 - **5/16**	VPUL 80 ACGB	**47.07**	VPUL 80 ATGB	**50.56**	VPUL 80 ABGB	**51.79**
8.5 - **21/64**	VPUL 85 ACGB	**48.48**	VPUL 85 ATGB	**52.06**	VPUL 85 ABGB	**53.35**
9 - **11/32**	VPUL 90 ACGB	**49.91**	VPUL 90 ATGB	**53.63**	VPUL 90 ABGB	**54.94**
10 - **3/8**	VPUL 100 ACGB	**54.43**	VPUL 100 ATGB	**62.34**	VPUL 100 ABGB	**68.54**
11 - **7/16**	VPUL 110 ACGB	**56.06**	VPUL 110 ATGB	**64.21**	VPUL 110 ABGB	**70.57**
12.5 - **1/2**	VPUL 125 ACGB	**57.74**	VPUL 125 ATGB	**66.14**	VPUL 125 ABGB	**72.69**

Schluter®-VINPRO-RO

Schluter®-VINPRO-RO is a finishing and edging profile for resilient covering (e.g., LVT) installations on stairs and outside corners of resilient surfaces. The reveal of the profile forms a symmetrically rounded corner along the surface edge.

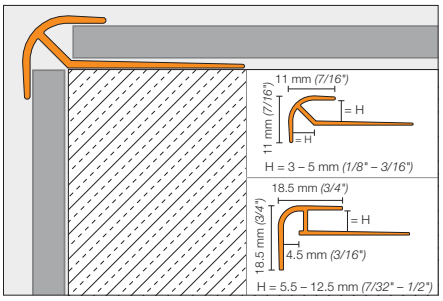






Schluter®-VINPRO-RO						
Length = 2.5 m - **8' 2-1/2"**	Brushed chrome anod. alu. (ACGB)		Brushed nickel anod. alu. (ATGB)		Brushed antique bronze anod. alu. (ABGB)	
H = mm - **in.**	Item No.	$ / Length	Item No.	$ / Length	Item No.	$ / Length
3 - **1/8**	VPRO 30 ACGB	**30.52**	VPRO 30 ATGB	**31.85**	VPRO 30 ABGB	**31.85**
4 - **5/32**	VPRO 40 ACGB	**31.18**	VPRO 40 ATGB	**32.49**	VPRO 40 ABGB	**32.49**
5 - **3/16**	VPRO 50 ACGB	**31.85**	VPRO 50 ATGB	**33.17**	VPRO 50 ABGB	**33.17**
5.5 - **7/32**	VPROL 55 ACGB	**43.33**	VPROL 55 ATGB	**45.04**	VPROL 55 ABGB	**45.46**
6 - **1/4**	VPROL 60 ACGB	**43.76**	VPROL 60 ATGB	**45.49**	VPROL 60 ABGB	**45.91**
6.5 - **17/64**	VPROL 65 ACGB	**44.21**	VPROL 65 ATGB	**45.93**	VPROL 65 ABGB	**46.38**
7 - **9/32**	VPROL 70 ACGB	**44.63**	VPROL 70 ATGB	**46.41**	VPROL 70 ABGB	**46.84**
7.5 - **19/64**	VPROL 75 ACGB	**45.08**	VPROL 75 ATGB	**46.87**	VPROL 75 ABGB	**47.30**
8 - **5/16**	VPROL 80 ACGB	**45.54**	VPROL 80 ATGB	**47.33**	VPROL 80 ABGB	**47.77**
8.5 - **21/64**	VPROL 85 ACGB	**46.00**	VPROL 85 ATGB	**47.81**	VPROL 85 ABGB	**48.25**
9 - **11/32**	VPROL 90 ACGB	**46.46**	VPROL 90 ATGB	**48.29**	VPROL 90 ABGB	**48.73**
10 - **3/8**	VPROL 100 ACGB	**46.92**	VPROL 100 ATGB	**48.77**	VPROL 100 ABGB	**49.21**
11 - **7/16**	VPROL 110 ACGB	**47.38**	VPROL 110 ATGB	**49.26**	VPROL 110 ABGB	**49.71**
12.5 - **1/2**	VPROL 125 ACGB	**47.86**	VPROL 125 ATGB	**49.76**	VPROL 125 ABGB	**50.20**

Schluter®-VINPRO-STEP

Schluter®-VINPRO-STEP is a finishing and edging profile for resilient floor covering (e.g. LVT) installations on stairs. Two versions are available: the 1/8"-3/16" *(3-5 mm)* version featuring a 1/4" *(6 mm)* wide top flange that is grooved to add slip resistance to the horizontal surface, and the 7/32" *(5.5 mm)* and larger versions that feature a 7/16" *(11 mm)* wide top flange with a smooth horizontal surface finish. The vertical leg covers the edge of the subassembly and top of the riser.

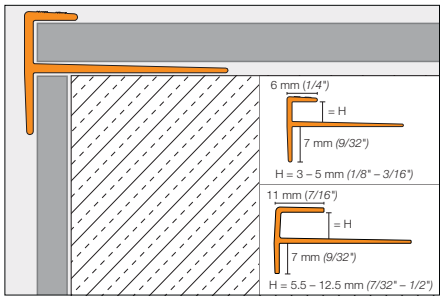




Schluter®-VINPRO-STEP

Length = 2.5 m - 8' 2-1/2"	Brushed chrome anod. alu. (ACGB)		Brushed nickel anod. alu. (ATGB)		Brushed antique bronze anod. alu. (ABGB)	
H = mm - in.	Item No.	$ / Length	Item No.	$ / Length	Item No.	$ / Length
3 - 1/8	VPST 30 ACGB	30.52	VPST 30 ATGB	31.85	VPST 30 ABGB	31.85
4 - 5/32	VPST 40 ACGB	31.18	VPST 40 ATGB	32.49	VPST 40 ABGB	32.49
5 - 3/16	VPST 50 ACGB	31.85	VPST 50 ATGB	33.17	VPST 50 ABGB	33.17
5.5 - 7/32	VPSTL 55 ACGB	35.07	VPSTL 55 ATGB	37.04	VPSTL 55 ABGB	39.77
6 - 1/4	VPSTL 60 ACGB	36.11	VPSTL 60 ATGB	38.16	VPSTL 60 ABGB	40.97
6.5 - 17/64	VPSTL 65 ACGB	37.18	VPSTL 65 ATGB	39.29	VPSTL 65 ABGB	42.21
7 - 9/32	VPSTL 70 ACGB	38.29	VPSTL 70 ATGB	40.48	VPSTL 70 ABGB	43.47
7.5 - 19/64	VPSTL 75 ACGB	39.47	VPSTL 75 ATGB	41.70	VPSTL 75 ABGB	44.77
8 - 5/16	VPSTL 80 ACGB	40.65	VPSTL 80 ATGB	42.94	VPSTL 80 ABGB	46.11
8.5 - 21/64	VPSTL 85 ACGB	41.85	VPSTL 85 ATGB	44.24	VPSTL 85 ABGB	47.51
9 - 11/32	VPSTL 90 ACGB	43.13	VPSTL 90 ATGB	45.56	VPSTL 90 ABGB	48.92
10 - 3/8	VPSTL 100 ACGB	44.41	VPSTL 100 ATGB	46.93	VPSTL 100 ABGB	50.39
11 - 7/16	VPSTL 110 ACGB	45.74	VPSTL 110 ATGB	48.33	VPSTL 110 ABGB	51.90
12.5 - 1/2	VPSTL 125 ACGB	47.12	VPSTL 125 ATGB	49.78	VPSTL 125 ABGB	53.45

Schluter®-VINPRO-STEP-R

Schluter®-VINPRO-STEP-R is a finishing and edging profile for resilient covering (e.g., LVT) installations on stairs. The top of the profile features a capping flange with a rounded leading edge, while the elongated vertical section provides increased visibility.

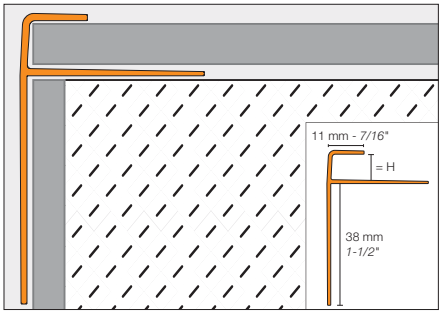



Schluter®-VINPRO-STEP-R

Length = 2.5 m - 8' 2-1/2"	Brushed chrome anod. alu. (ACGB)		Brushed nickel anod. alu. (ATGB)		Brushed antique bronze anod. alu. (ABGB)	
H = mm - in.	Item No.	$ / Length	Item No.	$ / Length	Item No.	$ / Length
3 - 1/8	VPSTRL 30 ACGB	56.96	VPSTRL 30 ATGB	61.76	VPSTRL 30 ABGB	61.84
4 - 5/32	VPSTRL 40 ACGB	57.52	VPSTRL 40 ATGB	62.37	VPSTRL 40 ABGB	62.46
5 - 3/16	VPSTRL 50 ACGB	58.11	VPSTRL 50 ATGB	63.00	VPSTRL 50 ABGB	63.08
5.5 - 7/32	VPSTRL 55 ACGB	58.69	VPSTRL 55 ATGB	63.62	VPSTRL 55 ABGB	63.70
6 - 1/4	VPSTRL 60 ACGB	59.26	VPSTRL 60 ATGB	64.26	VPSTRL 60 ABGB	64.35
6.5 - 17/64	VPSTRL 65 ACGB	59.85	VPSTRL 65 ATGB	64.91	VPSTRL 65 ABGB	65.00
7 - 9/32	VPSTRL 70 ACGB	60.46	VPSTRL 70 ATGB	65.55	VPSTRL 70 ABGB	65.64
7.5 - 19/64	VPSTRL 75 ACGB	61.06	VPSTRL 75 ATGB	66.21	VPSTRL 75 ABGB	66.29
8 - 5/16	VPSTRL 80 ACGB	61.69	VPSTRL 80 ATGB	66.87	VPSTRL 80 ABGB	66.97
8.5 - 21/64	VPSTRL 85 ACGB	62.29	VPSTRL 85 ATGB	67.55	VPSTRL 85 ABGB	67.62
9 - 11/32	VPSTRL 90 ACGB	62.92	VPSTRL 90 ATGB	68.23	VPSTRL 90 ABGB	68.31
10 - 3/8	VPSTRL 100 ACGB	63.55	VPSTRL 100 ATGB	68.90	VPSTRL 100 ABGB	68.99
11 - 7/16	VPSTRL 110 ACGB	64.19	VPSTRL 110 ATGB	69.60	VPSTRL 110 ABGB	69.68
12.5 - 1/2	VPSTRL 125 ACGB	64.82	VPSTRL 125 ATGB	70.28	VPSTRL 125 ABGB	70.37