


NEW! Schluter®-KERDI-LINE-VARIO

Variable length linear drain for tiled showers



The next generation of linear drains is here: KERDI-LINE-VARIO is a variable length linear drain for tiled showers. The brushed stainless steel channel and grate assembly can be cut to size onsite, and are therefore customizable to fit various shower sizes.

- Grate and channel assembly offered in lengths of 4' and 8', and can easily be cut to size onsite
- Slim design: only 1-11/16" (43 mm) wide
- Suitable for wall-adjacent and center drain placement
- End caps provided for trimmed edges, creating a clean, finished look
- Four grate designs in brushed stainless steel: HERRINGBONE, SLANT, SQUARE and FLORAL
- Flange kit includes integrated KERDI collar for a secure, waterproof connection, as well as both PVC and ABS couplings
- Flange can be placed wherever desired as per the position of the drainage outlet
- Grate and channel kit, and flange kit must be purchased separately

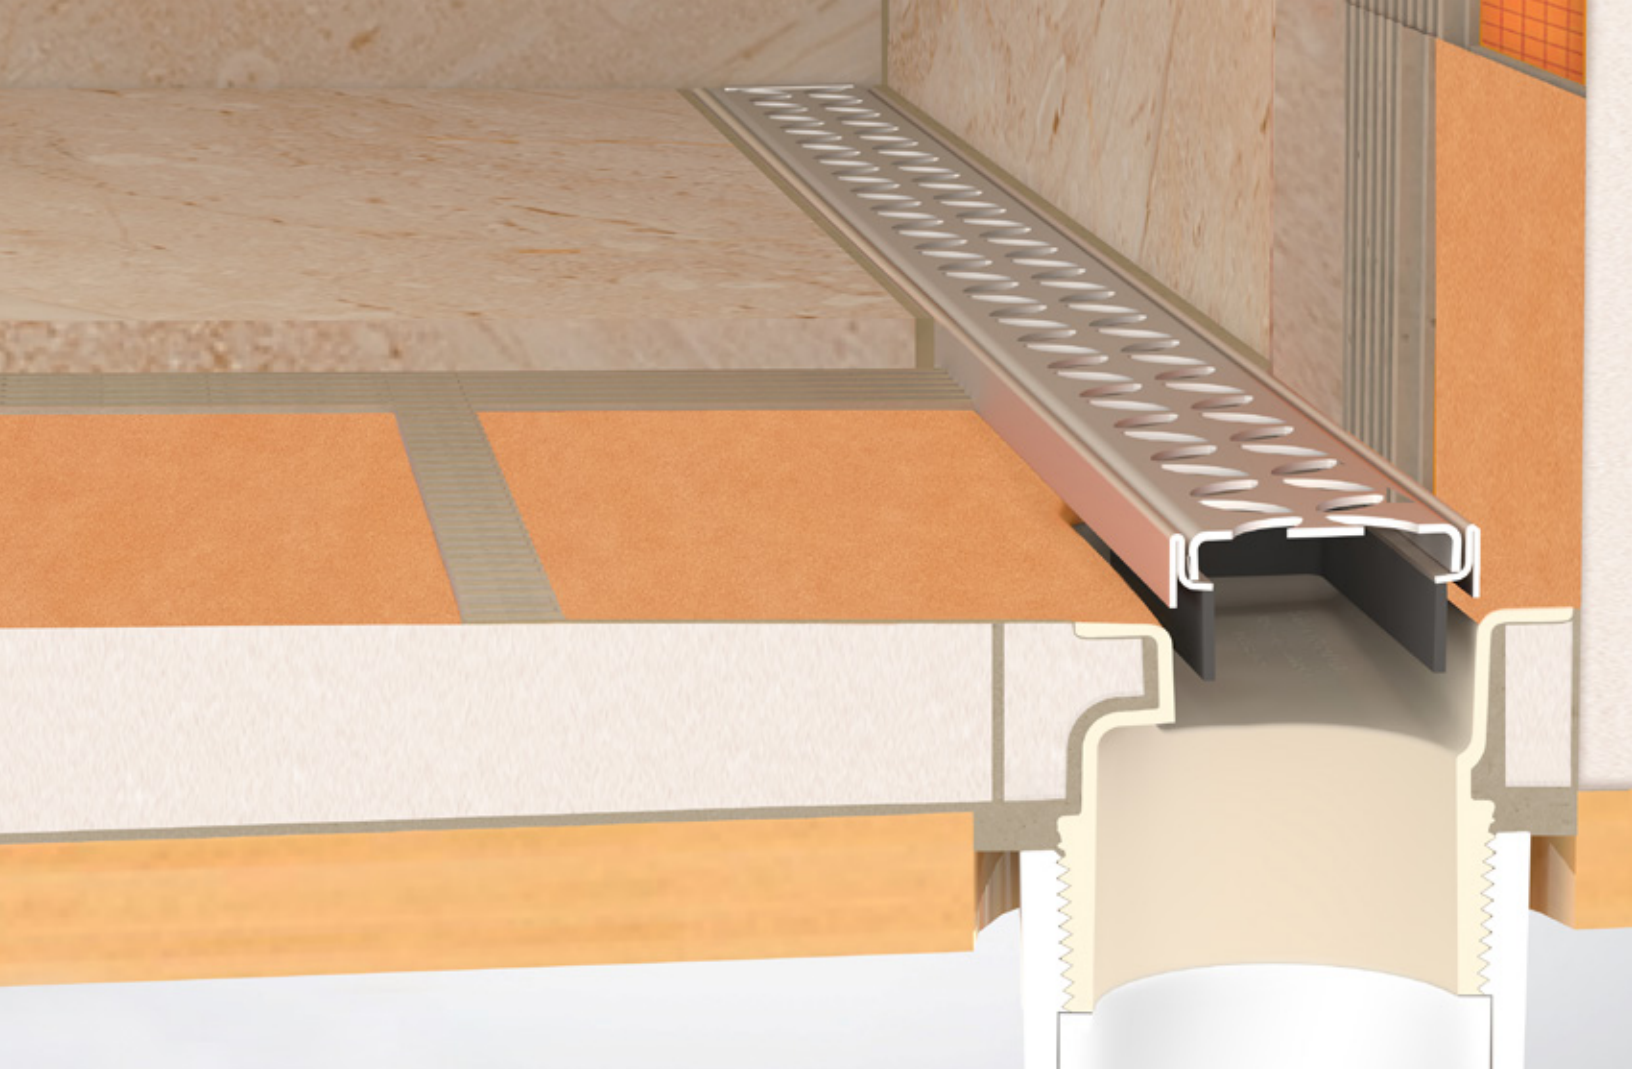

The Flange

The KERDI-LINE-VARIO flange comprises a polypropylene drain body with a standard 2" (50 mm) NPT outlet, which attaches to a standard, threaded, mechanical coupling for a simple connection to the drainpipe. The perimeter of the flange features an integrated collar made of KERDI that ensures a secure connection to the bonded waterproofing assembly, both in the floor area and on adjacent walls. The KERDI-LINE-VARIO flange is suitable for use with KERDI-SHOWER-LT/-LTS prefabricated shower trays as well as in mortar bed applications.

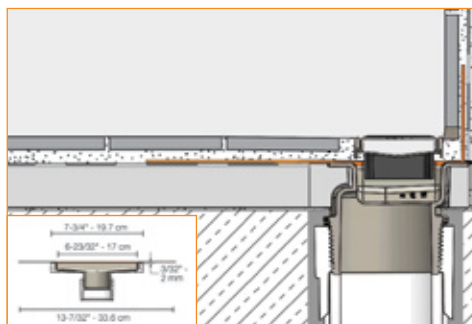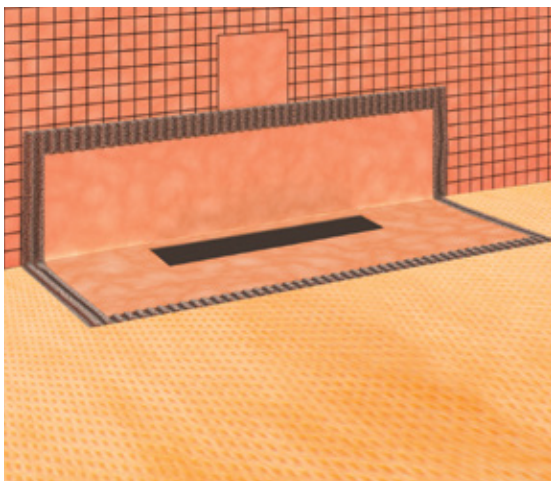

KERDI-LINE-VARIO

Flange kit

Item No.	\$ / Unit
KL VR 2 FLK	152.44

Flange Kit Components



Polypropylene flange with integrated KERDI collar



ABS and PVC coupling



Flange support



Waterproofing corners (4 inside, 2 outside)



Pipe seal – 3/4" (20 mm)

Mixing valve seal – 4-1/2" (114 mm)




Cleaning brush and grate removal tool




The Grate and Channel

The KERDI-LINE-VARIO grate and channel are made of formed stainless steel and are designed to be trimmed to length to ensure a perfect fit in custom applications. The channel features a drainage opening cut in the center that can be positioned anywhere within the overall trimmed length of the channel to avoid obstacles encountered during construction (e.g., floor joists). This allows for increased flexibility in the placement of the flange within the shower.

The grate nests into the corresponding channel and features a minimal reveal after installation. End caps are included to provide a clean finished look when the grate has been trimmed. The KERDI-LINE-VARIO grate and channel are available in 4-foot (122 cm) and 8-foot (244 cm) lengths in four grate designs: HERRINGBONE, SLANT, SQUARE, and FLORAL.

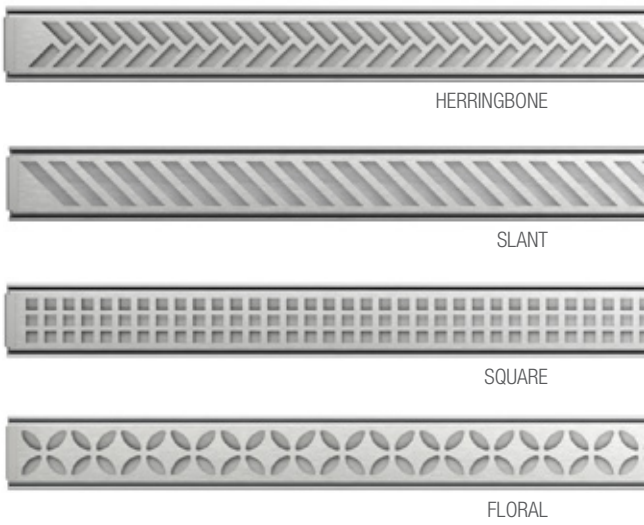

Grate Kit Components

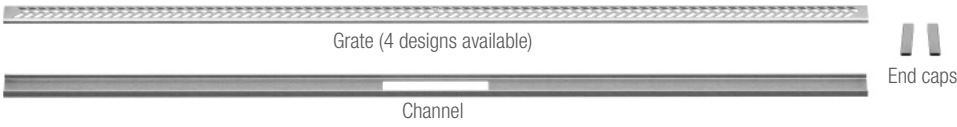

KERDI-LINE-VARIO						
Grate and Channel Kit – Brushed stainless steel						
Length = cm - in.	HERRINGBONE	SLANT	FLORAL	\$ / Unit	SQUARE	\$ / Unit
	Item No.	Item No.	Item No.		Item No.	
122 - 48	KL VRID 13 EB 122	KL VRID 14 EB 122	KL VRID 5 EB 122	309.38	KL VRID 3 EB 122	324.63
244 - 96	KL VRID 13 EB 244	KL VRID 14 EB 122	KL VRID 5 EB 244	582.44	KL VRID 3 EB 244	593.51

Versatile. Vogue. **VARIO.**

Learn More!

- Get product details
- Watch the installation video





NEW! Schluter®-KERDI-BOARD-SNLT

Shower niche with LIPROTEC LED lighting

LIPROTEC illuminated profile technology is now available for KERDI-BOARD niches, making it easier than ever to add warm, diffused lighting to your shower. The simple 3-step system is comprised of the KERDI-BOARD-SNLT shower niche with integrated LIPROTEC lighting technology, the power supply, and cables specifically designed to ensure a watertight connection.

The LIPROTEC system is designed such that both the connection at the niche and the connection at the power supply are in an enclosed and accessible location, as required by the National Electrical Code (NEC) and Canadian Electrical Code (CEC).

- LED lighting incorporated into KERDI-BOARD shower niches
- Code-compliant LED system that integrates into the Schluter®-Shower System for a bonded waterproof assembly
- Quick and easy installation
- Immediately ready for tile





See your Shower
in a Whole New

Light

Niches


Schluter®-KERDI-BOARD-SNLT

KERDI-BOARD-SNLT is a prefabricated shower niche of KERDI-BOARD that incorporates a profile with a diffused LIPROTEC LED light strip. It features a pre-installed waterproof connection box to ensure the electrical connection is code-compliant. KERDI-BOARD-SNLT is available in 3 sizes designed for a vertical installation and integrates with the Schluter-Shower System for a watertight assembly.

LIPROTEC LED Key Features:

- Brightness: 118 lumens
- Energy used: 1.7 watts
- Color accuracy (CRI): 95+
- Light appearance: 3000K (Warm White)
- UL listed in USA and Canada

KERDI-BOARD-SNLT					
Niche					
Item No.	Height	Width	Depth	Shelf	\$ / Unit
KB 12 SNLT 1 WW	305 mm - 12"	305 mm - 12"	89 mm - 3-1/2"	-	374.00
KB 12 SNLT 2 WW	508 mm - 20"	305 mm - 12"	89 mm - 3-1/2"	-	395.50
KB 12 SNLT 3 WW	711 mm - 28"	305 mm - 12"	89 mm - 3-1/2"	1	431.50




Drivers

Schluter®-LIPROTEC-ECX

LIPROTEC-ECX is an all-in-one LED power supply and in-wall dimmer switch that eliminates compatibility issues between drivers and dimmer switches.

- Smooth, even dimming
- Dimming range: 5% to 100%
- Can control multiple KERDI-BOARD-SNLT niches (up to 60 watts)
- Fits in a standard electrical box
- Includes three interchangeable face plates to match most decors
- UL listed in USA and Canada

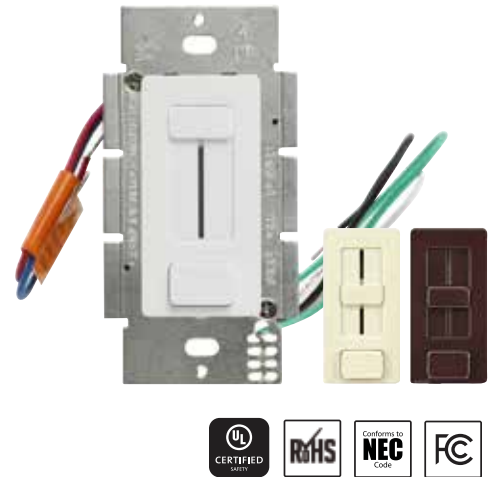

LIPROTEC-ECX				
LED driver and dimmer				
Item No.	Input	Output	Power	\$ / Unit
LT ECX 1W	120V AC	24V DC	60W	320.00

Schluter®-LIPROTEC-ECD

LIPROTEC-ECD is an in-line dimmable driver that is hard wired into your electrical. It is compatible with a range of popular dimmer switches, allowing you to have matching light switches throughout your bathroom.

- Dimming range: 5% to 100%
- Can control multiple KERDI-BOARD-SNLT niches (up to 24 watts)
- Includes metal enclosure
- Install in an accessible location, such as a closet of vanity
- Dimmer switch must be purchased separately, refer to the compatibility list on Schluter.com
- UL listed in USA and Canada



LIPROTEC-ECD				
Dimmable LED driver				
Item No.	Input	Output	Power	\$ / Unit
LT ECD 1W	120V AC	24V DC	24W	195.00

Cables

Schluter®-LIPROTEC-CW

LIPROTEC-CW cables feature a pre-installed waterproof snap-in gland for a secure connection to the top of the niche, and connectors to attach the LED strip.

- Rated for in-wall installation – no conduit required
- Class 2 low voltage cable (CL2)
- CSA FT4 rated (80°C)
- UL listed in USA and Canada

LIPROTEC-CW				
Cable for LIPROTEC white LED system				
Item No.	Length	Gauge	Conductors	\$ / Unit
LT CW / 4M	4 m - 13' 1-1/2"	20AWG	2	58.50
LT CW / 8M	8 m - 26' 3"	20AWG	2	95.50
LT CW / 15M	15 m - 49' 2-1/2"	20AWG	2	166.00





Learn More!

- Get product details
- Watch the installation video
- Download the planning guide

