

RONDINE S.p.A.

DECLARATION OF PERFORMANCE N° 001CPR2013-07-14

1. Identification of the product: **Dry-pressed ceramic tiles, with water absorption $E \leq 0,5\%$**
2. Intended use: **for internal and external walls and floorings**
3. Name and contact of the manufacturer: **Rondine S.p.A. Via Emilia Ovest, 53/A 42048 Rubiera (RE) Italia**
4. System of assessment and verification of constancy of performance (AVCP): **System 3 and 4**
5. Notified laboratory: **Modena Centro Prove s.r.l. – Via Sallustio n° 78 Modena (MO) Italy. Identification number 1599**
6. **Declared performances:**

Essential characteristics		Performance	Harmonised technical specification
Reaction to fire		A1fl/A1	EN 14411:2012
Release of dangerous substances, for: - Cadmium - Lead		NPD	
Breaking strength		$\geq 1300N$	
Slipperiness	DIN 51130	R11	
	ASTM-C 1028	Dry 0,81 – Wet 0,74	
	D.M. 236 - 89 Rif.B.C.R.	Dry 0,74 – Wet 0,67	
Tactility		NPD	
Bond strength/adhesion, for: Cementitious adhesive, type C1		$\geq 0,5 N/mm^2$	
Thermal shock resistance		Passed	
Durability for: -internal use: -external use: freeze-thaw resistance		Passed	

The performance of the product identified in point 1 is in conformity with the declared performances in point 6.

This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 3.

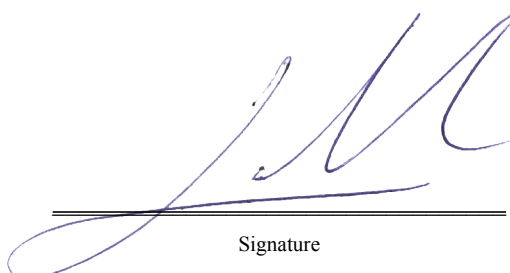
Signed for and behalf of the manufacturer by:

Lauro Giacobazzi - CEO

Name and function

Rubiera, 01/07/2013

Place and date of the issue


Signature